


LED SHOEBOX LIGHT




FEATURES


1. High efficiency LED Driver, the wide range input voltage AC100-277V(1-10Vdc Dimmer) or AC100-347V, Surge protection: 6KV.
2. Lumileds LED high luminous efficiency and long life.
3. Cast aluminium design, better cooling and easy replacement, light quality, LEDTj<185°F.
4. Excellent optical design, greatly improve the light utilization and evenness.
5. Photocell Control Available (Option).

DIMENSION


100W&150W




TYPE A




TYPE B

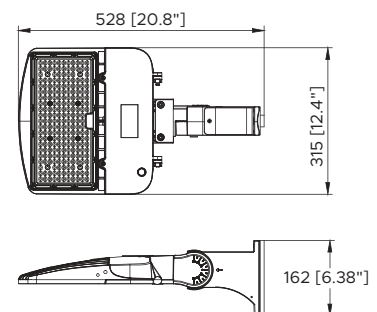




TYPE C





TYPE D

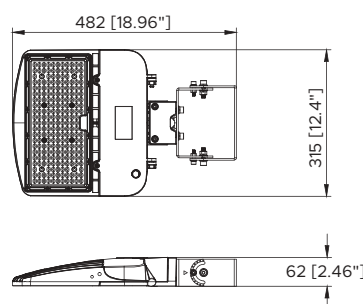



TYPE E

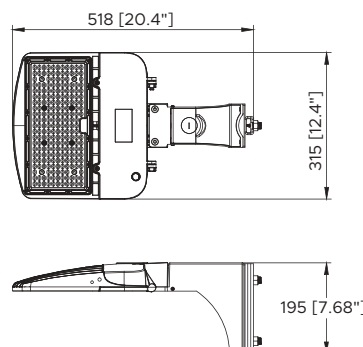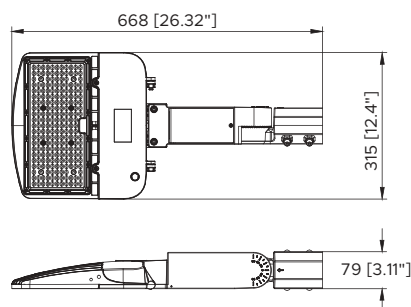



200W





TYPE A

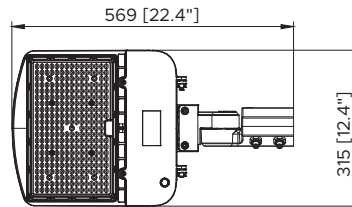



TYPE B

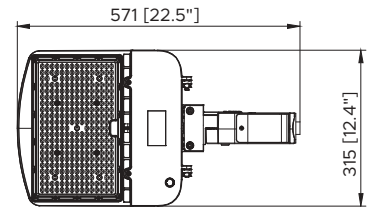



TYPE C





TYPE D

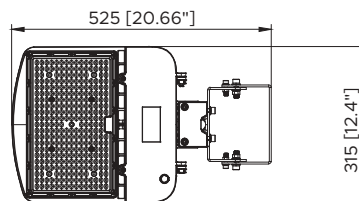



TYPE E



TYPE F

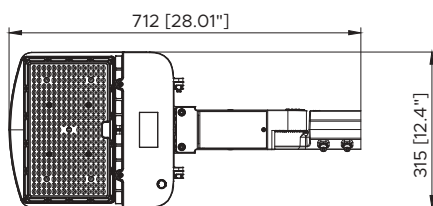


TYPE G

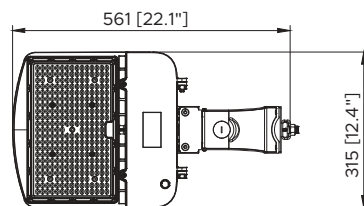


240W&300W


TYPE A

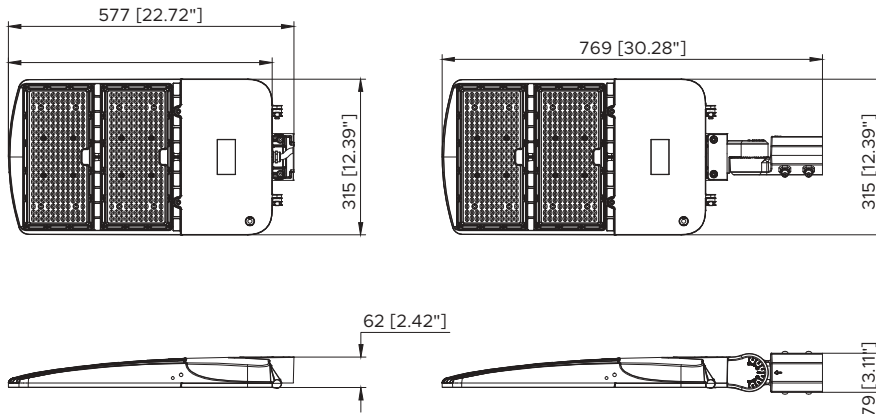


TYPE B

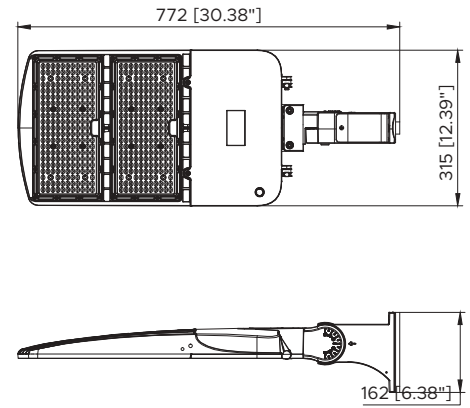


TYPE C

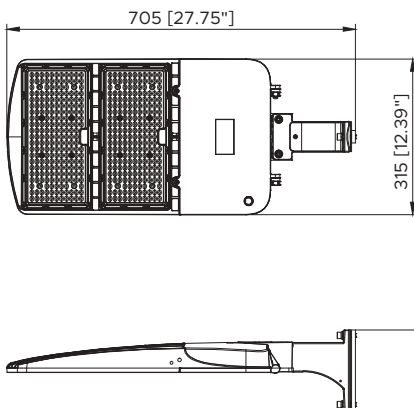


TYPE D

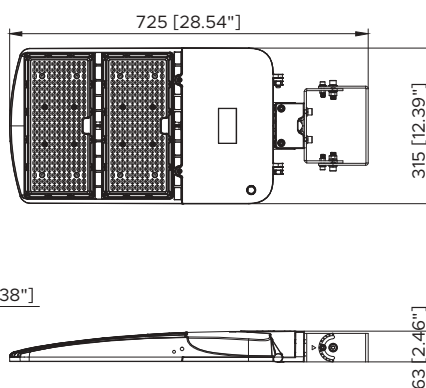


TYPE E

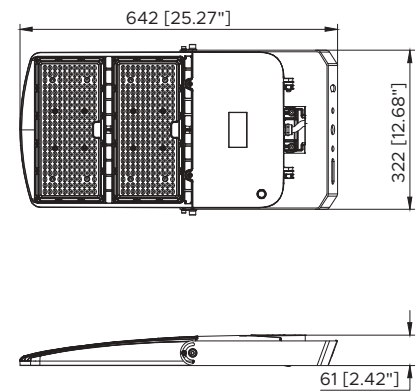

TYPE F

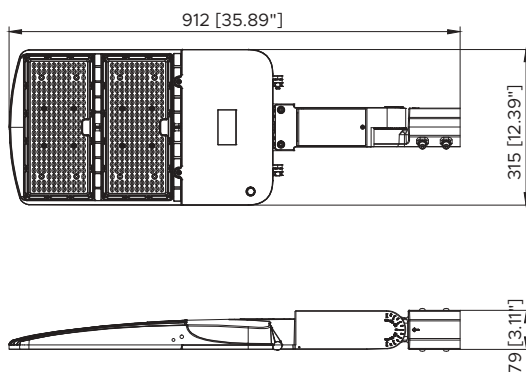

TYPE G

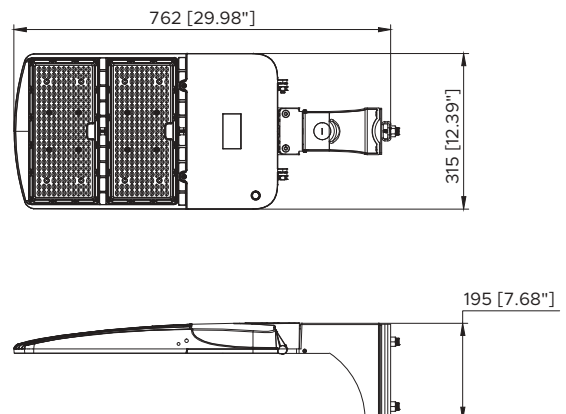


LIGHTING PARAMETERS

Part No.	Input Voltage	Frequency	Power	Rated Current
TS-XX0710-100W-X-XXK(XXX)	AC100-277V	50/60Hz	100W	1.1A
TS-XX0715-150W-X-XXK(XXX)			150W	1.65A
TS-XX0720-200W-X-XXK(XXX)			200W	2.2A
TS-XX0724-240W-X-XXK(XXX)			240W	2.64A
TS-XX0730-300W-X-XXK(XXX)			300W	3.3A
TS-XX0710-100W-X-MV-XXK(XXX)	AC100-347V	50/60Hz	100W	1.1A
TS-XX0715-150W-X-MV-XXK(XXX)			150W	1.65A
TS-XX0720-200W-X-MV-XXK(XXX)			200W	2.2A
TS-XX0724-240W-X-MV-XXK(XXX)			240W	2.64A
TS-XX0730-300W-X-MV-XXK(XXX)			300W	3.3A

- ◆ where XX can be "SL" or "FL"; X can be "H", "L" or "HY" (Y=number);
 XXK can be any number for color temperature: 40K, 50K, 57K, 65K;
 (XXX) can be blank = no sensor function, "PIR" = PIR sensor, "PTC" = Photocontrol;
 "MS" = Microwave sensor, "PIP" = PIR sensor and Photocontrol
 or "MSP" = Microwave sensor and Photocontrol.

Lamp Bead Model	LUMILEDS		
Certificates	UL, CUL		
Lighting Angle	TYPE III-M / TYPE IV-S / TYPE V		
Lighting Efficiency	130 Lm/W		
Color Rendering Index	Ra>80		
Working Temperature	-40°F ~+113°F / -40°C ~ +45°C		
Storage Temperature	-40 °F ~+158 °F / -40°C ~ +70°C		
Environment Location	WET LOCATIONS		
Life span	>50000H		
Lamp shell	BROWN / BLACK		
Accessories options	Photocell; Shorting cap; Surge protector		
	PIR sensor; Motion sensor		
	Waterproof cover plate of photocell hole		
Accessories mounting brackets	TYPE A (Slip-fitter) 	TYPE B (Square/Round pole mount with slip-fitter function) 	
	TYPE C (Square/Round pole mount) 	TYPE D (Trunnion) 	
	TYPE E (Yoke) 	TYPE F 	TYPE G 

EXTENDED FUNCTION

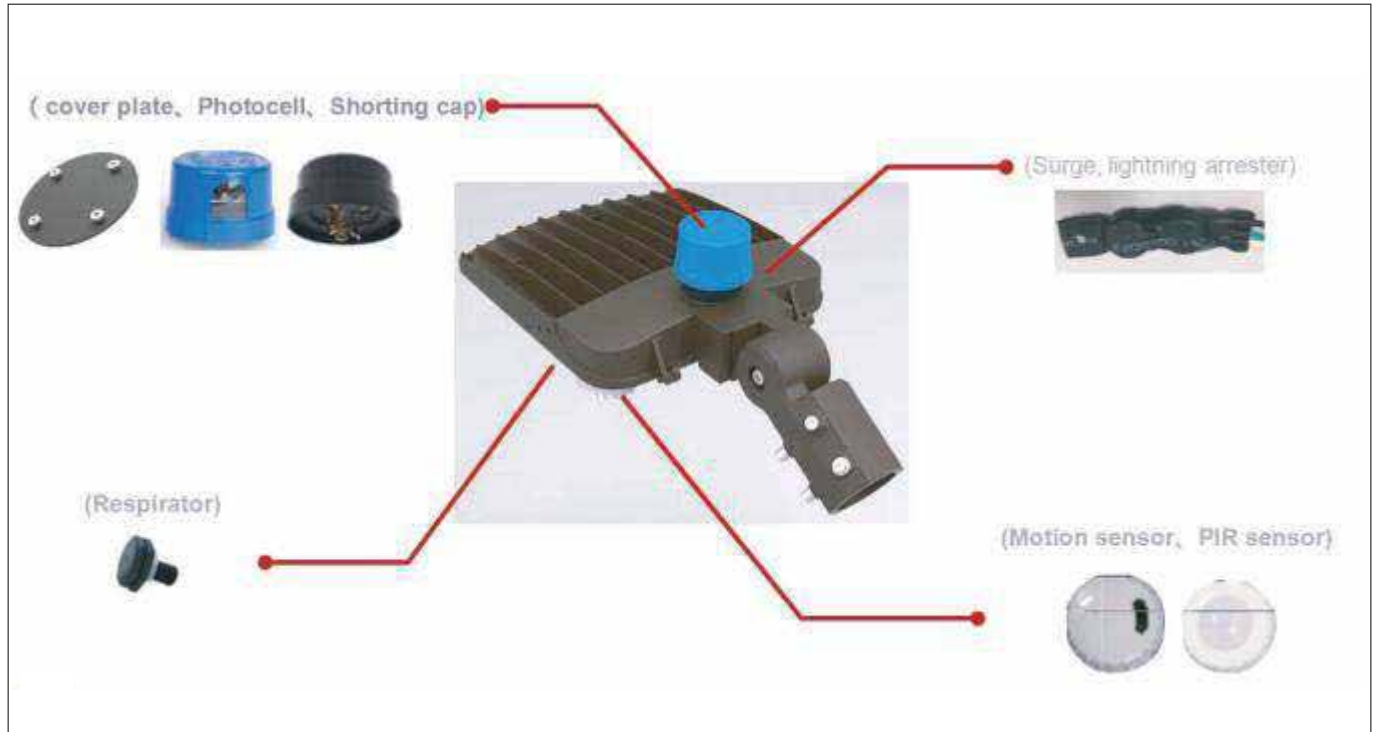

Product Application



PACKING/WEIGHT

The fixture and bracket will be packed separately.

fixture	Outber box (L*W*H)	Qty/Ctn (pcs)	N.W/pcs (lbs/Kg)	G.W/pcs (lbs/Kg)	Remarks
100W	18.11"*14.37"*5.71" 460*365*145mm	1	6.28/2.85	8.29/3.76	1.0M cable
150W		1	6.48/2.94	8.50/3.86	
200W	19.84"*14.37"*5.71" 504*365*145mm	1	6.96/3.16	8.86/4.02	
240W	27.72"*14.37"*5.71" 704*365*145mm	1	10.31/4.68	12.56/5.70	
300W		1	10.75/4.88	13.00/5.90	

Bracket	Inber box (L*W*H)	Outber box (L*W*H)	Qty/Ctn (pcs)	N.W/pcs (lbs/Kg)	G.W/pcs (lbs/Kg)
TYPE A	9.25"*4.33"*3.54" 235*110*90mm	14.96"*9.29"*10.04" 380*236*255mm	8	2.95/1.34	3.39/1.54
TYPE B	9.45"*6.61"*4.13" 240*168*105mm	17.32"*13.86"*10.24" 440*352*260mm	8	3.92/1.78	4.36/1.98
TYPE C	6.93"*6.61"*3.94" 176*168*100	16.54"*13.86"*7.72" 420*352*196mm	8	2.47/1.12	2.66/1.21
TYPE D	7.09"*7.09"*2.76" 180*180*70mm	14.80"*11.81"*7.87" 376*300*200mm	8	2.91/1.32	3.35/1.52
TYPE E	15"*3.9"*3.39" 381*99*86mm	15.59"*14.33"*8.66" 396*364*220mm	8	2.02/0.92	2.42/1.10

SAFETY INFORMATION

- 1、 Using the standard working voltage: AC100~277V/100-347V, 50/60Hz, do not exceed.
- 2、 Be sure the power supply is turned off before installation.
- 3、 Switch off power of the mains supply or the connection lead respectively before doing any works.
- 4、 Please note waterproof, dustproof, electricity prevention and shockproof for the external power wires.
- 5、 Directly fix bolts on the installation stem through the hole on the mounting bracket.
- 6、 Be sure the connection between the wires is in good condition when install the lamps, beware of leakage.
- 7、 Please read the specification carefully before installation.
- 8、 The complete installation must be handled by an electrical expert.