

SZ-EL-1.2W (R-W)

ILLUMINATION

Long lasting, efficient ultra bright white LED lamp heads.
2.4 Watt(12pcs 2835 SMD*0.2W) per head.
High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.

ELECTRICAL

Dual 120/277 voltage.
220/240 voltage available.
Charge rate/power "ON" LED indicator light and push-to-test. switch for mandated code compliance testing.
3.6V Long life, maintenance-free, rechargeable NiCd battery.
Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
Fully automatic solid-state, two rate charge initiates battery charging to recharge a discharged battery in 24 hours.
Remote capacity option available.

MOUNTING

Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections.
Suitable for wall mount.
Side knockout for conduit applications.



HOUSING

Injection-molded, engineering grade. 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

WARRANTY/LISTING

Five year warranty on all electronics and housing.
Three year warranty for battery
meets UL 924
cULus: UL Listed for damp location(0°C-50°C),
meet CAN/CSA-c22.2 no. 141-02 standard for unit equipment.
UL listed for WET LOCATION.

DIMENSIONS

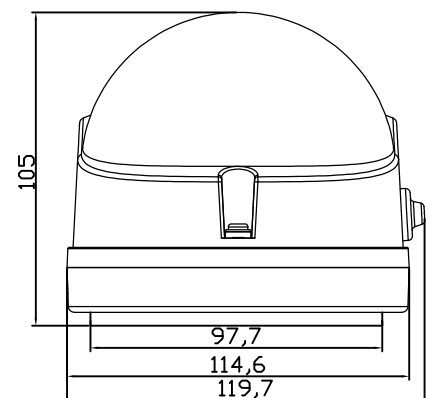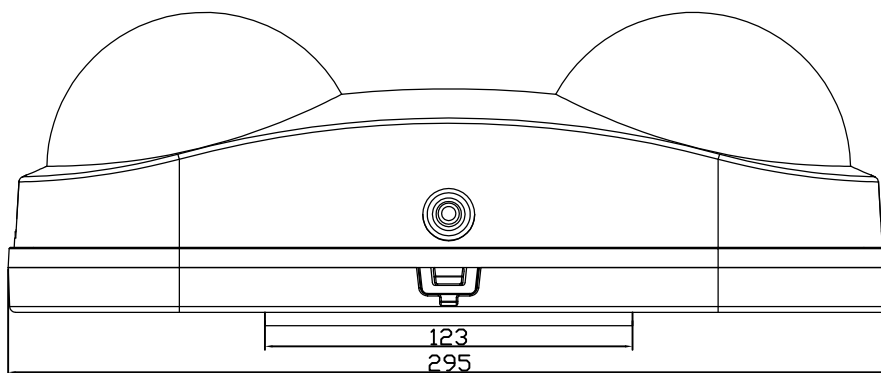

Call NOW (888)-977-8737 WWW.SUPERTECHLEDS.COM

SAN ANTONIO

3714 Northwest Loop 410,
San Antonio, Texas, 78229.

(210)-290-8493

DALLAS/FORTWORTH

6805 NE Loop 820, Suite#406,
North Richland Hills, Texas, 76180.

(817)-576-4113

RICHARDSON

318 South Central Expressway, STE 113,
Richardson, Texas, 75080, United States.

(469)-372-0795