



LED LINEAR HIGH BAY

APPLICATIONS:

Premium indoor luminaire for hanging or pendant mounting in high ceiling spaces above 25 feet. Suitable for gymnasiums, warehouses, manufacturing, packaging, storage, aisles, and covered decks.

CONSTRUCTION:

Ultra Slim Design. Manufactured for durability using aluminum sheet housing with semi-gloss coating to resist corrosion, discoloration, and scratching. Ventilated driver bay for additional heat dissipation. Damp Location rated.

ELECTRICAL:

Input voltage 120-277V with 1-10V Continuous Dimming. Operating temperatures -40°F to 113°F (-40°C to 45°C).

WARRANTY:

5 yr /50K hrs.

EMERGENCY:

Externally Bracket Mounted, 8W 90 Minute Emergency Battery Backup available.

CONTROLS:

Optional fixture integrated Photocell, Bi-level Dimming, and Motion Detection Sensor with Remote Control available.

OPTICS:

Anti-UV Polycarbonate Micro-Filter Lens standard with 90° beam angle.

MOUNTING:

V-Hooks and Chains for Hanging standard. Optional Pendant or Surface Mount Brackets available.

ATTRIBUTES:

Part No.	Power	Input current	Input Voltage	Frequency	PF	THD	Luminous Flux	CCT	Ra	Warranty
TS-LHB5-4FT300W-H-50K	300W	2.75A	AC120-277V	50/60HZ	>0.9	<20%	40500LM	5000K	>80	5 Years

Call NOW (888)-977-8737 **WWW.SUPERTECHLEDS.COM**

SAN ANTONIO

3714 Northwest Loop 410,
San Antonio, Texas, 78229.

 **(210)-290-8493**

DALLAS/FORTWORTH

6805 NE Loop 820, Suite#406,
North Richland Hills, Texas, 76180.

 **(817)-576-4113**

RICHARDSON


318 South Central Expressway, STE 113,
Richardson, Texas, 75080, United States.

 **(469)-372-0795**

SPECIFICATIONS:

Energy Data	Input Voltage: 120-277V Input Frequency: 50/60 Hz Wattage: 300W Power Factor: >0.9 THD: ≤20% Operating Temperature: -40°F to 113°F (-40°C to 45°C)
Lighting Data	Lumens: 40500lm Efficacy: 135 lm/W CCT: 5000K Dimmable: 1-10V CRI: Ra≥80 L70: 50000 hrs
Physical Data	Size: 4-FT Color: White Lens Type: Polycarbonate Diffuser: Micro-Filter Rating: Damp Rated Warranty: 5yr/50K

DIMENSION:

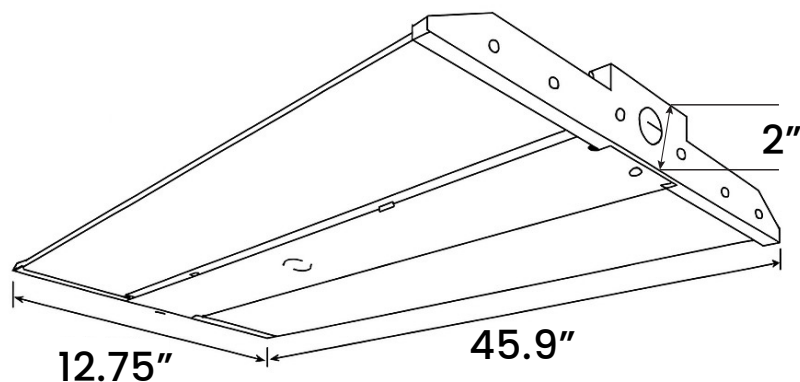

Call NOW (888)-977-8737 WWW.SUPERTECHLEDS.COM

SAN ANTONIO

3714 Northwest Loop 410,
San Antonio, Texas, 78229.

(210)-290-8493

DALLAS/FORTWORTH

6805 NE Loop 820, Suite#406,
North Richland Hills, Texas, 76180.

(817)-576-4113

RICHARDSON


318 South Central Expressway, STE 113,
Richardson, Texas, 75080, United States.

(469)-372-0795


INSTALLATION INSTRUCTIONS

CHAIN INSTALLATION:


1. Hook the chain as below pic

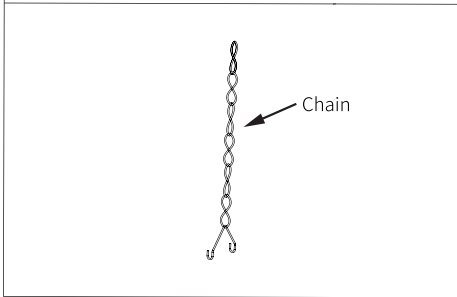


2. Insert the hook into the slotted holes, as show below.

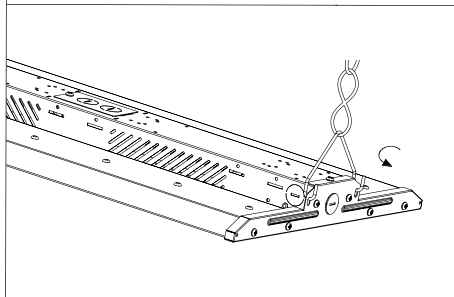


3. Hook up the chain on the ceiling anchor .

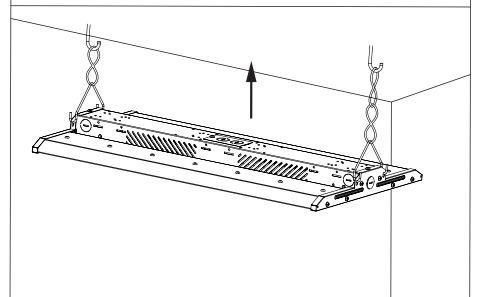


4. Turn off power, and make wiring connections with terminal cap (see wiring instruction below).

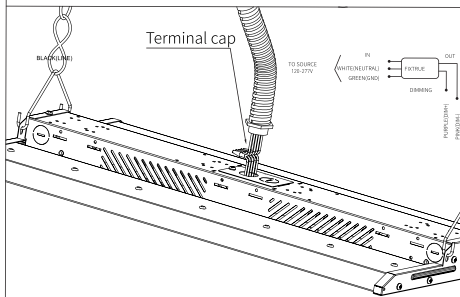


5. Insert the terminal cap and wires into the driver box.

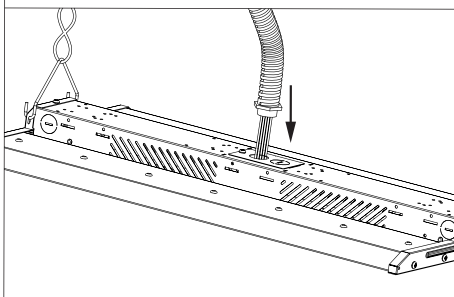

6. Insert the wire terminal joint to the wire entry. Installation completed.

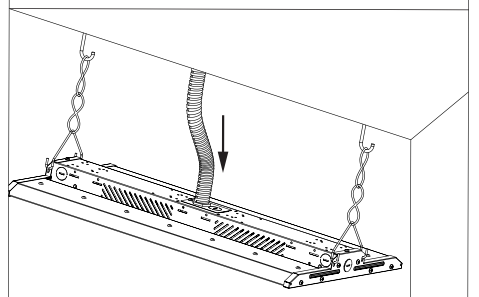

7. Flip the color temperature switch to the desired color temperature (note: if both toggle switches need to be dialed to the corresponding color temperature) : flip the power switch to the desired wattage, as shown in the figure.

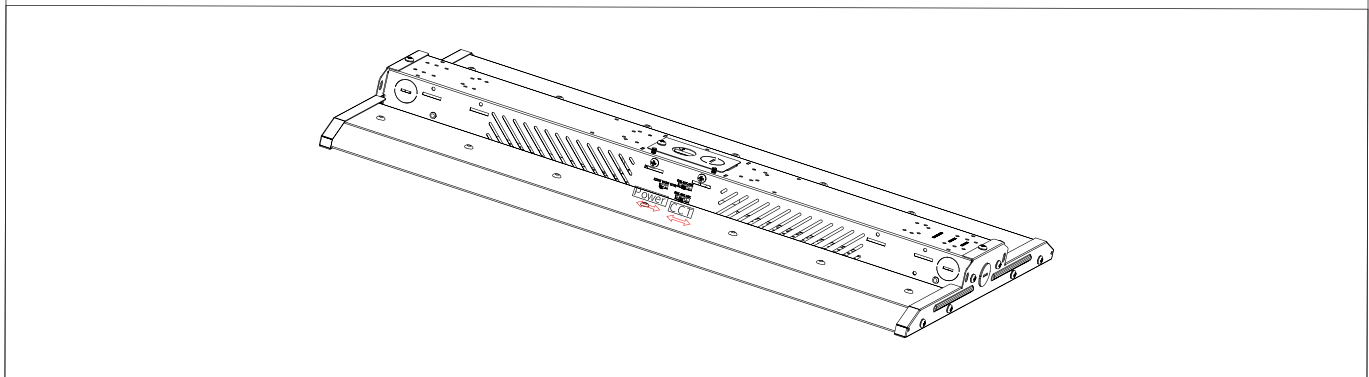

Call NOW (888)-977-8737 WWW.SUPERTECHLEDS.COM

SAN ANTONIO

3714 Northwest Loop 410,
San Antonio, Texas, 78229.

 **(210)-290-8493**

DALLAS/FORTWORTH

6805 NE Loop 820, Suite#406,
North Richland Hills, Texas, 76180.


 **(817)-576-4113**

RICHARDSON


318 South Central Expressway, STE 113,
Richardson, Texas, 75080, United States.

 **(469)-372-0795**


CHAIN INSTALLATION:

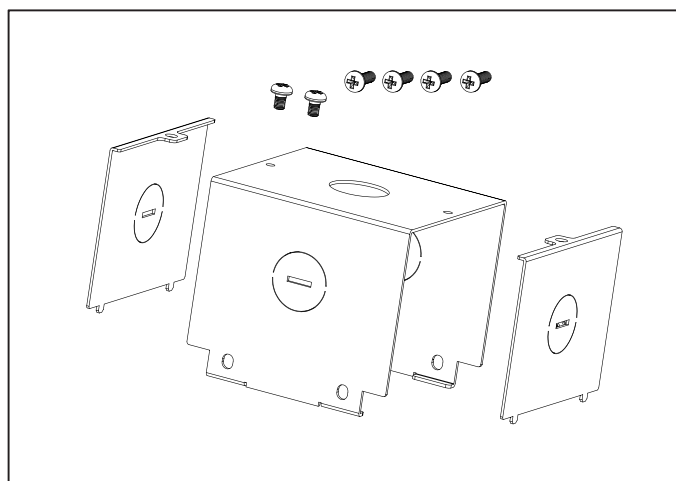


1. Fixed the junction box on the fixture with the provided hardware.

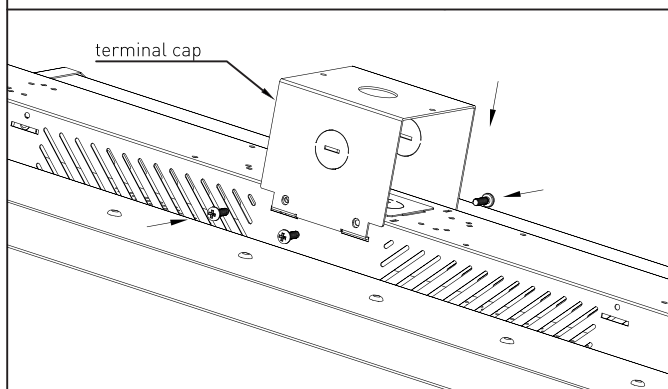


2. Fixed the high bay on the steeve with provided hardware.

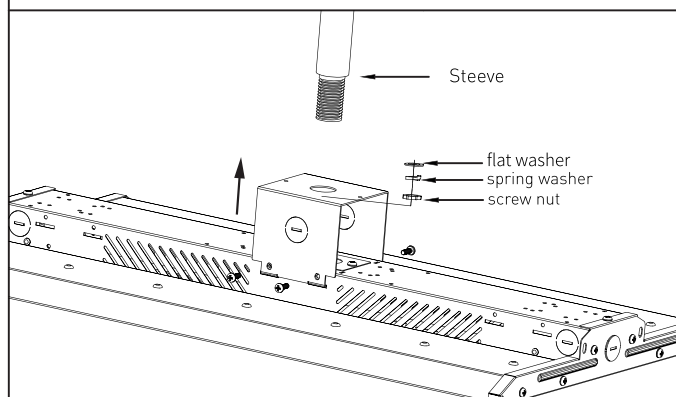


3. Turn off power, and make wiring connections with terminal cap. (see wiring instruction below)

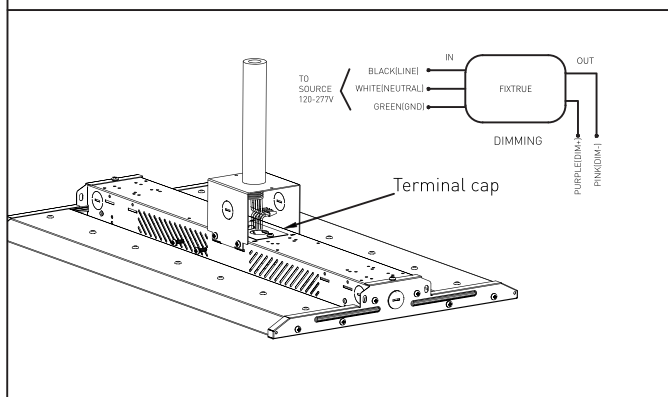

4. Attach both face plates to the Junction box with the provided hardware

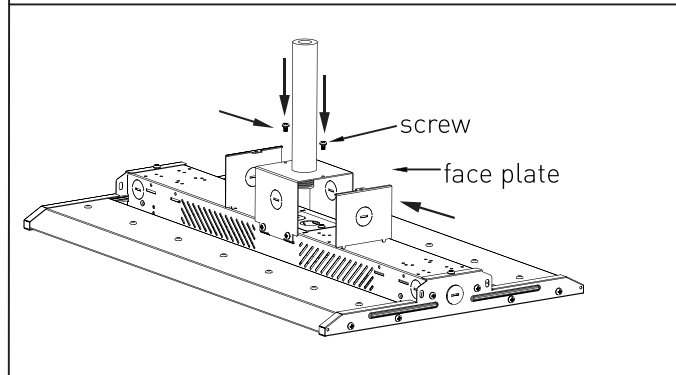

5. Installation completed.

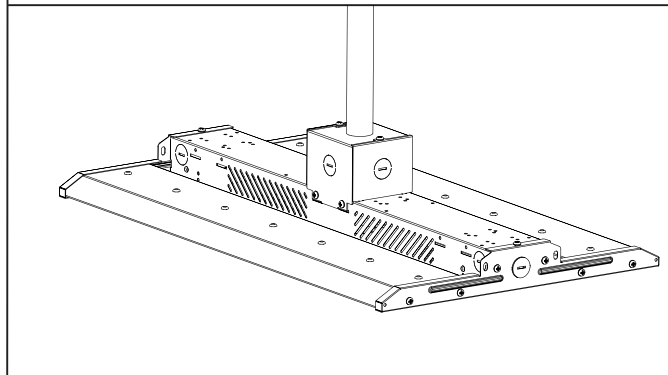

Call NOW (888)-977-8737 WWW.SUPERTECHLED.COM

SAN ANTONIO

3714 Northwest Loop 410,
San Antonio, Texas, 78229.

(210)-290-8493

DALLAS/FORTWORTH

6805 NE Loop 820, Suite#406,
North Richland Hills, Texas, 76180.

(817)-576-4113

RICHARDSON

318 South Central Expressway, STE 113,
Richardson, Texas, 75080, United States.

(469)-372-0795