

PLEASE READ THIS MANUAL CAREFULLY BEFORE USING THE PRODUCT

Upon receiving the fixture, carefully inspect it for any freight damage. Report any damage immediately to the delivery carrier. Verify that the catalog description on the packing slip matches the fixture label to ensure you have received the correct item.

READ AND FOLLOW THESE SAFETY INSTRUCTIONS!

- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, please read all warnings and instructions included with and on the fixture box and all fixtures' labels.
- Before installing, servicing, or performing routine maintenance on the fixture, follow these general precautions.
- Commercial installation, servicing, and maintenance of fixtures should be performed by a qualified licensed electrician.
- For Residential Installation: If you are unsure about the installation or maintenance of the fixture, consult a qualified, licensed electrician, and check your local electrical codes.
- Maintenance of the fixture should be performed by person(s) familiar with the fixture's construction, operation, and any hazards involved.
Regular fixture maintenance programs are recommended.
- This fixture is intended to be connected to a properly installed and grounded UL listed junction box.
- It will occasionally be necessary to clean the outside of the refractor/lens. The refractor/lens should be cleaned with a solution of warm water and any mild, non-abrasive household detergent. Afterwards, rinse with clean water and wipe dry. If optical assembly become dirty on the inside, wipe the refractor/lens and clean in above manner, replacing damaged gaskets as necessary.
- DO NOT INSTALL DAMAGED PRODUCT! This fixture has been properly packed so that no parts should have been damaged during transit. Inspect to confirm.
- Any part damaged or broken during or after assembly should be replaced.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, this matter should be referred to Revolve LED LLC.

WARNING
RISK OF ELECTRIC SHOCK

- Disconnect or turn off power before installing or servicing.
- Verify that supply voltage is correct by comparing it with the fixture's label information.
- Make all electrical and grounded connections are in accordance with the National Electrical Code (NEC) and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

WARNING
RISK OF BURN

- Allow the fixture to cool down before handling. Avoid touching the enclosure, lens, or light source. Do not exceed the maximum wattage marked on fixture's label.
- Follow all manufacturer warnings, recommendations and restrictions including but not limited to: driver type, mounting locations/methods, replacement, and recycling.

CAUTION
RISK OF PRODUCT DAMAGE

- Never connect components over load.
- Do not mount or support the fixture in a way that can cut the outer jacket or damage the wire insulation.
- Unless specified otherwise in the product specifications, Never connect a LED product directly to dimmer packs, occupancy sensors, timing devices, or other control devices. LED fixtures must be powered directly from a switched circuit.
- Unless specified otherwise in the product specifications, do not restrict fixture ventilation. Ensure there is sufficient airspace around the fixture. Avoid covering the LED fixture with insulation, foam, or any other material that may impede convection or cooling.

CAUTION
RISK OF INJURY

- Wear gloves and safety glasses at all times when removing the fixture from the from carton, installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.


CAUTION
RISK OF FIRE

- Keep combustible and other flammable materials away from the refractor/lens.
- Do not operate next to people, combustible materials, or substances sensitive to heat.

- Unless specified otherwise in the product specifications, do not exceed fixture’s maximum ambient temperature.
- Use the fixture only in its intended location.
- LED products are polarity sensitive. Verify correct polarity before installation.
- Electrostatic Discharge (ESD) can damage LED fixtures. Personal grounding equipment must be worn at all time during installation and servicing of the unit.
- Do not touch individual electrical components, as this can cause ESD, shortened fixture lifespan, or altered performance.
- Some components inside the fixture may not be serviceable. If your unit requires service, stop using the unit immediately and contact a manufacturer representative for assistance.
- Changes or modifications not expressly approved by the manufacturer will void the product warranty.

» **Parts List**

1. Strip Light Canopy Pendant Kit
2. Installation Guide


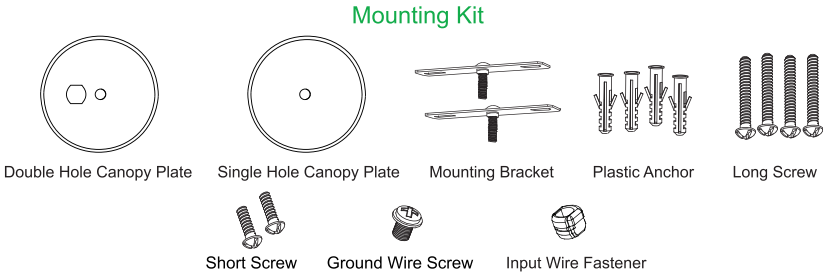


Cautions before Installation


1. Open top covers and check whether the wires at both ends of the fixture are securely connected with quick connecting terminals. Do not use if the wires are exposed.
2. Please turn off the power before installing the fixture.

Wiring Direction Indication

When wiring, please start from the side of the fixture with the control board.

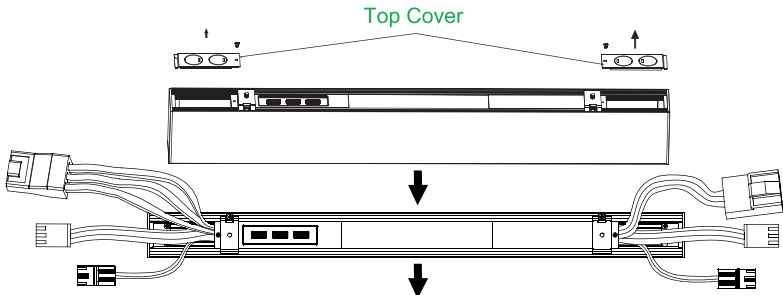

Quick Connecting Terminal

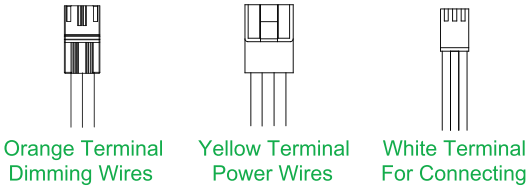

» **Installation Instructions (Pendant Mounting)**

1 Turn off the power before installation and check whether the mounting surface is firm. Attach the mounting brackets to the mounting surface by using screws.

Mounting Bracket Short Screw

Suggested Mounting Bracket Installation Distance: 2ft: 15.75"-19.69" / 4ft: 31.50"-39.37"

Plastic Anchor Mounting Bracket Long Screw

2 Remove the top cover on the side with the control board of the fixture and take out quick wiring terminals. Cut off the quick connecting terminal for wiring.

Note:
If do not use the dimming quick connecting terminal, it is unnecessary to cut off.

Top Cover

3 Conduit Mounting Kit not offered

Φ 7/8"

Note:
If needed, please use a conduit kit to protect wires.

4

Pass the power wires of the fixture through the side hole on the double hole canopy plate. Attach the ground wire to the mounting bracket by using a flat washer and the ground wire screw.

Flat Washer

Flat Washer not offered

5

Finish Wiring. Use offered wire-nuts to make insulation measures. Push the wires into the junction box.

(Please read the installation guide in the packaging box of the luminarie for more details for wiring.)

6

Attach one side of the steel cable rope into first mounting bracket by twisting. Attach the single hole canopy plate to second mounting bracket by using one side of the steel cable rope in the same way. Attach the canopies to the screws on the brackets by twisting.

(Please read the installation guide in the packaging box of the luminarie for suspension mounting.)

Plastic Wire Fastener

Power cord


7

Adjust the length of steel cable ropes as your requiemnt and attach the other side of steel cable ropes to the fixture by twisting. The installaion is completed.

Adjustable Button

» **Wiring Diagram**

• **Without an Emergency Battery Backup**

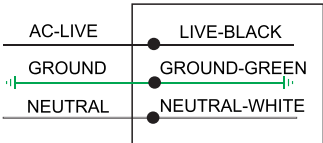

- Note:
1. Wiring must comply with the wiring diagram.
 2. If do not use dimming wires, do not need to cut off the quick connecting terminal.
 3. Remind again: Cut off the power before installation ! ! !

• **With an Emergency Battery Backup**

