



## No Light Spotting



### FEATURES & BENEFITS

- Ultra thin Surface / Recessed Mount Puck light
- Changeable magnetic trim ring and surface mount ring
- Uniform luminance even lighting
- No glare
- Dimmable
- 110° beam angle
- CRI 80 or better
- 3 Year Limited Warranty
- 50,000+ hr lifetime



### APPLICATIONS

- Cabinet Lighting

### SPECIFICATIONS

|                   |                                            |
|-------------------|--------------------------------------------|
| Voltage           | 12 VDC                                     |
| Watts             | 2.2 Watts                                  |
| Lumens            | 80 Lumens/W                                |
| Color Temperature | 2700K, 3000K, 4000K                        |
| Light Source      | 2.2W SMD LED                               |
| Size              | Ø 75 x H 7 mm (2.95" x 0.27")              |
| CRI               | >80                                        |
| Beam Angle        | 110°                                       |
| Trim Color        | White (Optional Chrome/Black/Satin Nickle) |
| IP Grade          | IP44                                       |
| Environment Temp  | Max 45°C (113°F) Indoor Use                |
| Lifespan          | 50,000 hrs                                 |
| Certifications    | ETL                                        |
| Limited warranty  | 3 years                                    |


### DIAGRAM

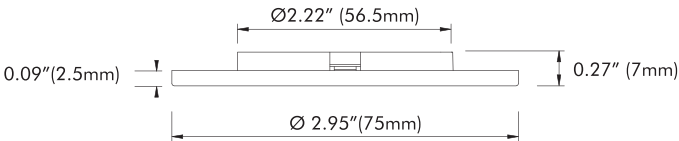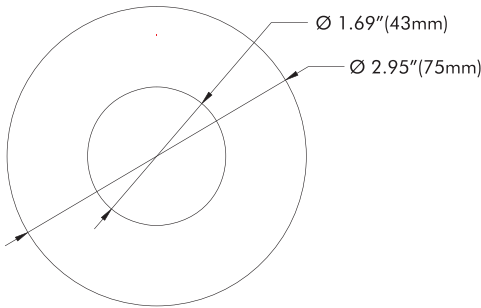

### CHANGEABLE TRIM & MOUNTING RING





Magnets to attract and hold the trim ring

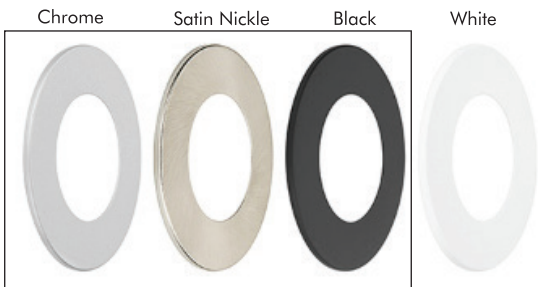

Optional Colors

PHOTOMETRICS

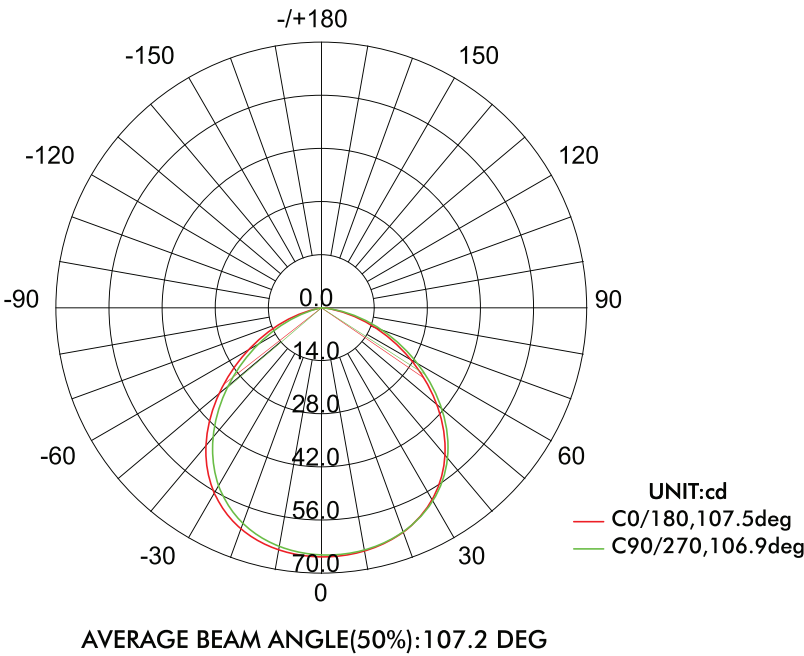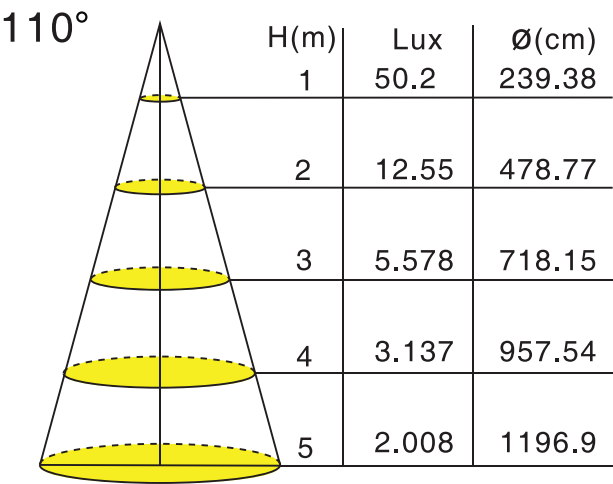

OPTIONAL ACCESSORIES

|                                                |                                                |
|------------------------------------------------|------------------------------------------------|
| MD-012-030VTDHV2<br>Regulated Dimmable Class 2 | MD-012-060VTDHV2<br>Regulated Dimmable Class 2 |
|                                                |                                                |