


Specification of Wall Pack with glass cover




A variety of drivers are available

Using an isolated, 0-10V dimmable.

Protection level: Wet Location

The wall pack is sealed by silicone ring that can avoid dust completely and be waterproof, also the internal level ensures that the installation is horizontal.

Product Dimension

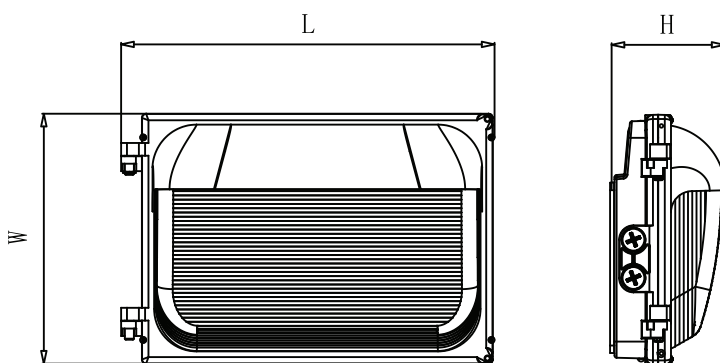

Model	L×W×H (mm)
TS-WP17GS-60W-TCP(XX)	221.8*235*108/8.73''*9.25''*4.25''
TS-WP17GM-120W-TCP(XX)	349.8*235*108/13.8''*9.25''*4.25''
TS-WP17GL-150W-TCP(XX)	452.3*315*108/17.8''*9.25''*4.25''


Part No.	Power	Input Voltage	Luminous Flux	Luminous Efficacy	CCT	Viewing Angle	Ra	PF	Warranty
TS-WP17GS-60W-TCP(XX)	20W/40W/60W	AC120-277V AC120-347V	2700lm/5400lm/8100lm	135lm/W	3000K	Type IV	> 70	>0.9	5 Years
TS-WP17GM-120W-TCP(XX)	80W/100W/120W		10800lm/13500lm/16200lm		4000K				
TS-WP17GL-150W-TCP(XX)	100W/120W/150W		13500lm/16200lm/20250m		5000K				

"(XX)" can be any two letters to represent motion sensor or blank, PT= Photocell, MS=microwave sensor, PM= Photocell and microwave sensor

Lighting Parameters


Power	60W	120W	150W
Rate Current	0.55A	1.1 A	1.38A
Working Voltage	AC120-277V/AC120-347V		
Wattage abjutstable	60-40-20W	120-100-80W	150-120-100W
Beam Angle	TypeIV		
Color Temperature	30/40/50K		
lamp's Luminous Efficiency	> 135lm/W		
Color Rendering Index	Ra > 70		
Operating Temperature	-40°F ~ + 104°F		
Storage Temperature	-40°F ~ + 158°F		
Environment Location	Wet Location		
Life-span	≥50000H		
Materials	ADC12		
The color of the lamp shell	Brown		
Mounting	Bracket fixed		
Dimming	0-10V dimming standard		

Optical Properties

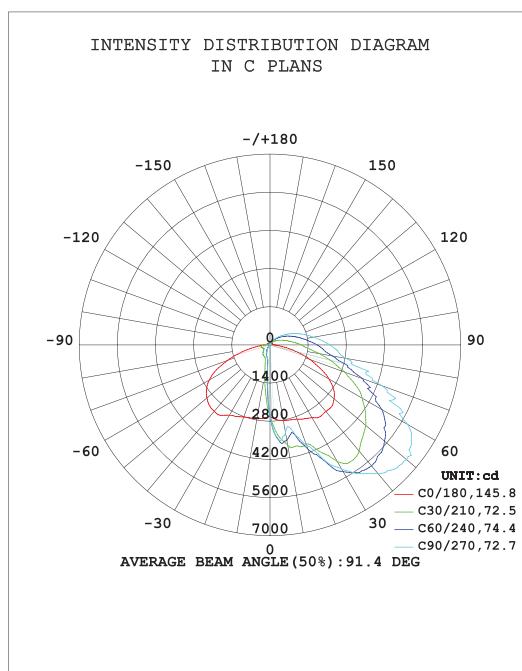


Installation Instruction

1. Unscrew the plug.




2. Switch power and color temperature.


The DIP switches of the CCT from left to right are 3000K, 4000K and 5000K.
Power Dip switch From left to right: lowest power, middle power, highest power.

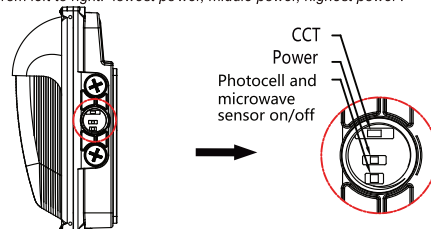


3. Remove the screws from the top cover.




4. Open the lid.

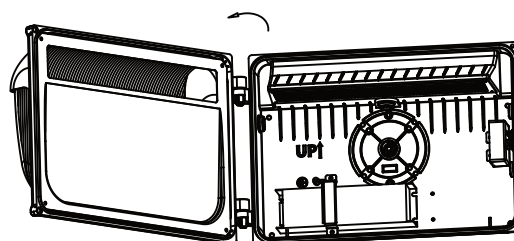

5. Fixed according to traditional installation method.

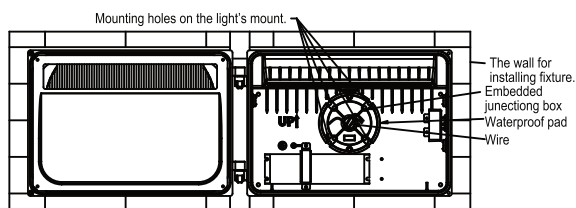


6. Connect the mains supply to the drive harness as shown in the figure.

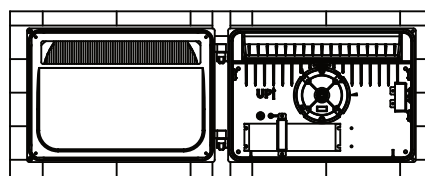


7. Secure the safety rope to the wall.

Only 150W Warp pack require this operation.

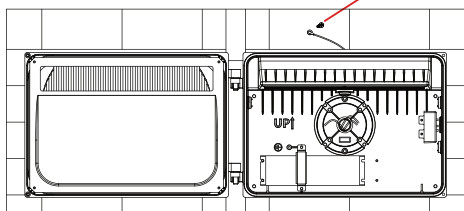


8. Secure the safety rope to the housing.


Only 150W Warp pack require this operation.

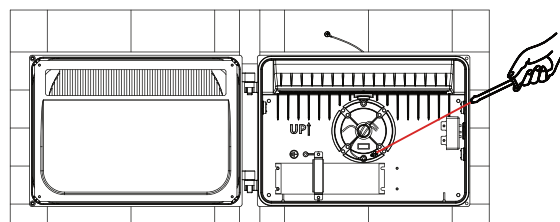


9. Wiring diagram.



10. Close the lid and Install the cap screws and installation completed.



Applications

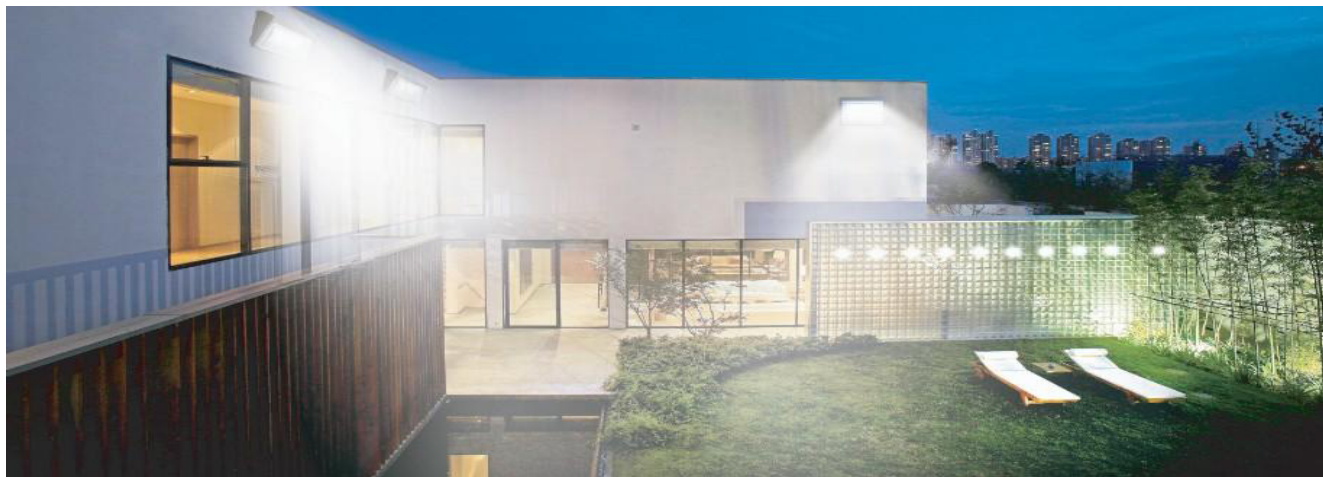

Packing /weight

Model	Inner box (L*W*H)	Outer box (L*W*H)	Qty/CTN (pcs)	N.W./pcs (lbs/kg)	G.W./CTN (lbs/kg)	Remark
TS-WP17GS-60W-TCP(XX)	10.4"*10.0"*5.31" 265*255*135mm	21.1"*11.2"*11.8" 535*285*300mm	4	6.50/2.95	27.6/12.5	0.15M cable
TS-WP17GM-120W-TCP(XX)	15.0"*10.4"*5.31" 380*265*135mm	15.7"*11.2"*11.8" 400*285*300mm	2	9.48/4.30	20.5/9.3	
TS-WP17GL-150W-TCP(XX)	19.1"*13.6"*5.31" 485*345*135mm	19.9"*14.4"*11.8" 505*365*300mm	2	14.6/6.60	31.1/14.1	

Safety Information

- 1、Using the standard working voltage: AC120~277V/AC120~347 V, 50/60Hz, do not exceed.
- 2、Be sure the power supply is turned off before installation.
- 3、Switch off power of the mains supply or the connection lead respectively before doing any works.
- 4、Please note waterproof, dustproof, electricity prevention and shockproof for the external power wires.
- 5、Directly fix bolts on the installation stem through the hole on the mounting bracket.
- 6、Be sure the connection between the wires is in good condition when install the lamps, beware of leakage.
- 7、Please read the specification carefully before installation.
- 8、The complete installation must be handled by an electrical expert