



LED Canopy Light

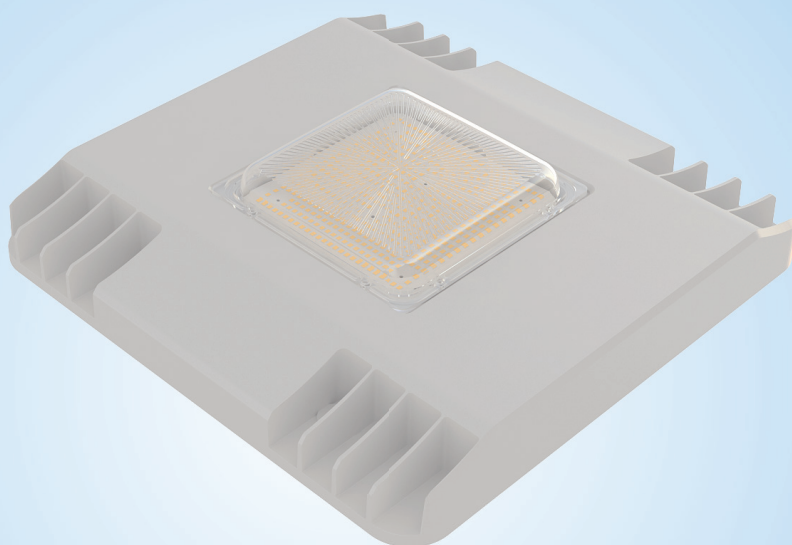


Product Introduction

1. Uses professional optical technology to obtain 130 lumens per watt and project light down in a wide projection.
2. Fixture is designed for better cooling with Larger Size, aluminum Heat Sink to ensure long life performance.
3. Integrated driver, easy to install and operate.
4. UV stabilized, one-piece polycarbonate lens.
5. UL-classified to avoid electrical shock and fire hazard.
6. Ideal for lighting a car port, gas station, driveway canopy, gym, garage or any other high bay lighting locations.

Product parameters

Model	TS-TCP1515-150W-X-X-XXK	TS-TCP1515-150W-X-X-TCP
Working Voltage	AC100-277V	
LED Brand	2835	
Color Temperature	4000K,5000K,5700K	3500/4000K/5000K
Beam angle	120°	
Luminous Efficacy	130LM/W	
Color Rendering Index	Ra≥80	
Driver Brand	Sosen/Lifud	
Working temperature	-40°F~+113°F	
Storage temperature	-40°F~+158°F	
Environment Location	Wet Location	
Lifespan	≥50000H	

External Dimension

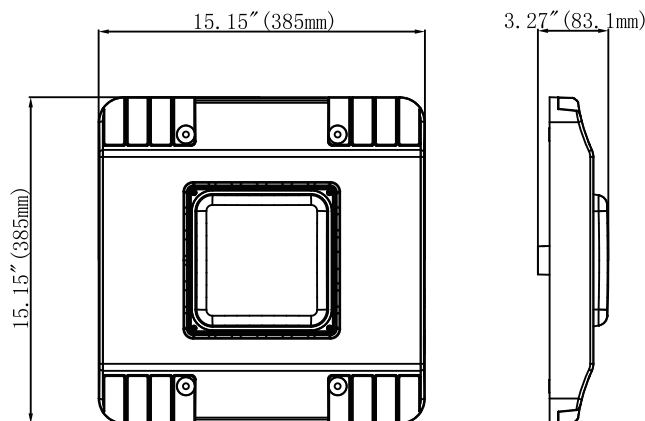


Note:

All dimensions units are inch/metric with tolerances of ± 1 , unless there is noted.


Installation Instruction

Installation method I : Ceiling Installation


1. Fix the safety rope on the back of fixture by supplied screw PWM4*8.

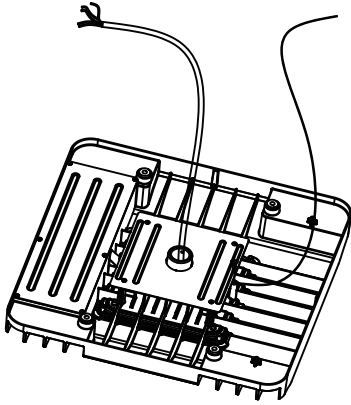


2. Drill 5 holes on the ceiling based on the diameter of supplied plastic anchor as picture, to make them match the holes on the fixture.

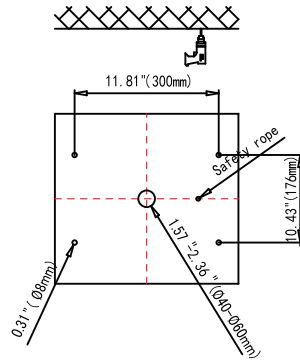


3. Screw the anchors to holes on ceiling respectively.

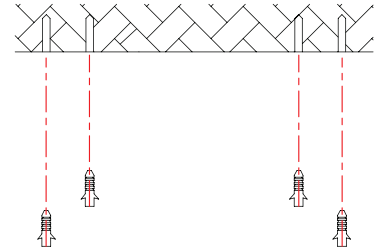

4. Screw the safety rope. And fix the fixture to the ceiling with tapping screws.




5. Connecting the wires respectively:
Black-L, White-N, Green-earth,
PURPLE: DIM+, PINK: DIM-

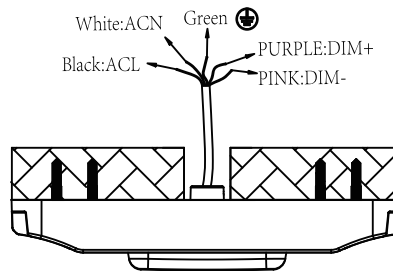


Installation method II: Pole-pendent Installation


1. Connecting wires from fixture and 3/4\"/>

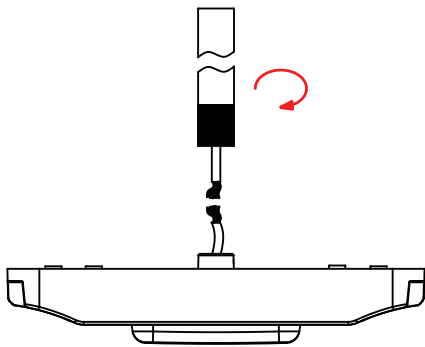

2. Rotating the 3/4\"/>

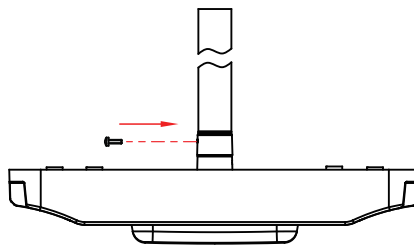

Applications

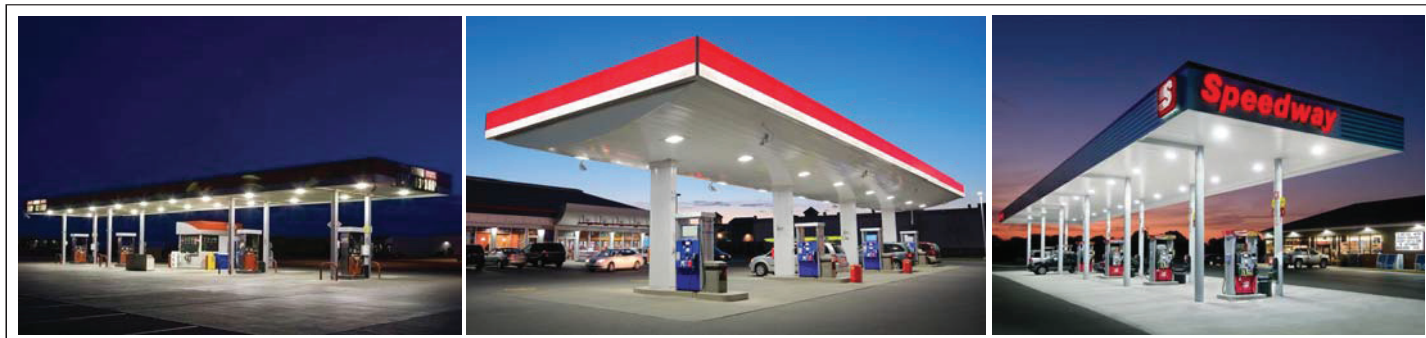

Packing /weight

Model	Carton Size (L*W*H)	QTY (pcs)	Net Weight (kg/lbs)	Gross Weight (kg/lbs)	Remarks
TS-TCP1515-150W-X-X-XXX	385*385*83.1mm(15.15"*15.15"*3.27")	1	3.7/8.16	4.35/9.59	1M cable
TS-TCP1515-150W-X-X-TCP					

Cautions

1. Be certain electrical power is OFF before and during installation and maintenance.
2. Risk of fire or electric shock. Installation requires knowledge of electrical systems. For install by qualified electrician only. Do not attempt installation if not qualified.
3. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
4. Do not use the LED Canopy Light near heating appliances/ elements.
5. The input voltage and lamps should be matched after connecting the power line, please make sure the wiring section is insulated.

LED Canopy Light must be operated within an ambient temperature range of -30°C (-22°F) and 45°C(113°F).
LED Canopy Light is not intended for use with emergency exits.